


MANUAL

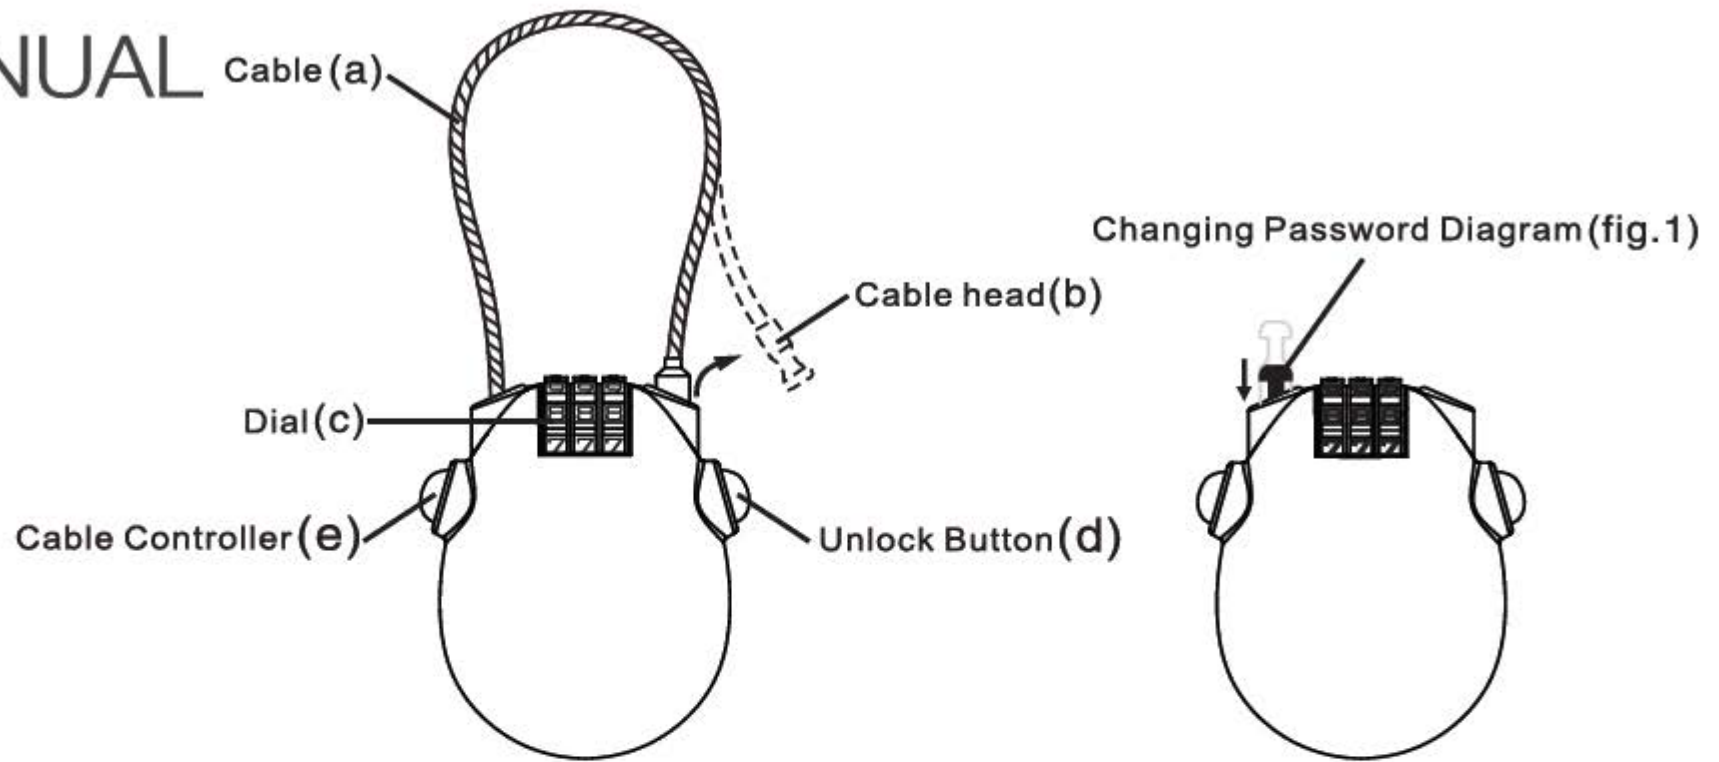

1. Before use, set your lock combination code. The default code is 000.
2. First set the number wheels (C) to 000.
3. Push the cable head (B) down inside the lock until it clicks (fig.1).
4. Now you can set your personal code. After that, pull out the cable (B).
5. Adjust the cable (A) with the cable control button (E).
6. To lock the cable push the cable head (B) into the lock body until it clicks.
Turn the combination wheels (C) randomly and the cable is locked.
7. To unlock the cable, use your personal password and push the unlock button (D).